



DATA DISPLAY GROUP

Datasheet

LG Display

LP125WF2-SPB1

HD-10-131

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

SPECIFICATION FOR APPROVAL

() Preliminary Specification

(●) Final Specification

| | |
|-------|-------------------|
| Title | 12.5" FHD TFT LCD |
|-------|-------------------|

| | |
|----------|--|
| Customer | |
| MODEL | |

| | |
|----------|----------------------|
| SUPPLIER | LG Display Co., Ltd. |
| *MODEL | LP125WF2 |
| Suffix | SPB1 |

*When you obtain standard approval,
please use the above model name without suffix

| APPROVED BY | SIGNATURE |
|-------------|-----------|
| / | |
| / | |
| / | |

Please return 1 copy for your confirmation with your signature and comments.

| APPROVED BY | SIGNATURE |
|-----------------------|-----------|
| J. Y. Lee / Manager | |
| REVIEWED BY | |
| J.S . Park / Manager | |
| PREPARED BY | |
| S. B. Park / Engineer | |
| Y. D. Kim / Engineer | |
| J. H. Shin / Engineer | |

Products Engineering Dept.
LG Display Co., Ltd

Product Specification


Contents

| No | ITEM | Page |
|-----|---|-------|
| | COVER | 1 |
| | CONTENTS | 2 |
| | RECORD OF REVISIONS | 3 |
| 1 | GENERAL DESCRIPTION | 4 |
| 2 | ABSOLUTE MAXIMUM RATINGS | 5 |
| 3 | ELECTRICAL SPECIFICATIONS | |
| 3-1 | ELECTRICAL CHARACTERISTICS | 6-7 |
| 3-2 | INTERFACE CONNECTIONS | 8 |
| 3-3 | eDP SIGNAL TIMING SPECIFICATION | 9 |
| 3-4 | SIGNAL TIMING SPECIFICATIONS | 10 |
| 3-5 | SIGNAL TIMING WAVEFORMS | 10 |
| 3-6 | COLOR INPUT DATA REFERENCE | 11 |
| 3-7 | POWER SEQUENCE | 12 |
| 4 | OPTICAL SPECIFICATIONS | 13-15 |
| 5 | MECHANICAL CHARACTERISTICS | 16-18 |
| 6 | RELIABILITY | 19 |
| 7 | INTERNATIONAL STANDARDS | |
| 7-1 | SAFETY | 20 |
| 7-2 | EMC | 20 |
| 7-3 | Environment | 20 |
| 8 | PACKING | |
| 8-1 | DESIGNATION OF LOT MARK | 21 |
| 8-2 | PACKING FORM | 21 |
| 8-3 | Label Description | 22 |
| 9 | PRECAUTIONS | 23-24 |
| A | APPENDIX. Enhanced Extended Display Identification Data | 25-27 |

| | | |
|---------------|-------|------------------------------------|
| May. 04. 2013 | 20 | Update International standard |
| Aug. 12. 2013 | 10 | Update Timing spec |
| | 25-27 | Update EDID |
| Aug. 26. 2013 | 6 | Add Power Consumption |
| | 8 | Change description about Connector |
| Aug. 28. 2013 | 4, 6 | Update Power Consumption Spec. |
| | 7 | Add Max Input current |
| Sep. 05. 2013 | - | Final CAS |

1. General Description

The LP125WF2 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system and Touch Screen Panel. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally black mode. This TFT-LCD has 12.5 inches diagonally measured active display area with Full HD resolution (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP125WF2 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP125WF2 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP125WF2 characteristics provide an excellent flat display. LP125WF2 is the 'Touch total solution' model. It means it includes LCM & TSP all. (TSP is assembled by a 'Direct Bonding' method)

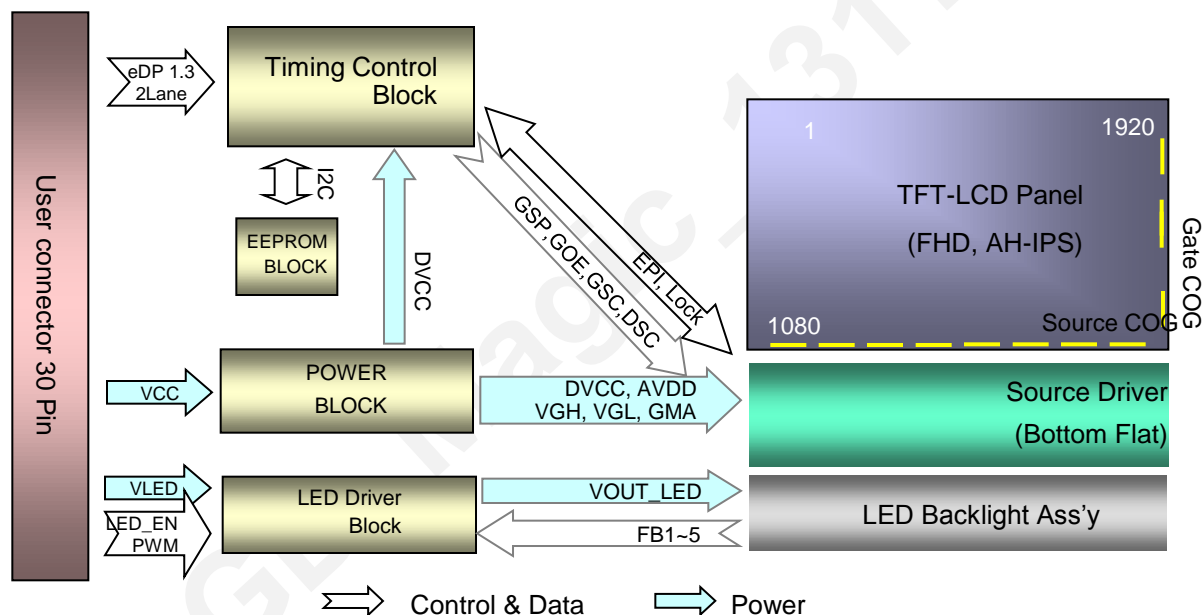

General Features

| | |
|------------------------|--|
| Active Screen Size | 12.5 inches diagonal |
| Outline Dimension | 290.5(H, typ) × 170.7(V, typ) × 2.85(D, max) [mm] |
| Pixel Pitch | 0.144mm x 0.144mm (176ppi) |
| Pixel Format | 1920 horiz. By 1080 vert. Pixels RGB strip arrangement |
| Color Depth | 6-bit, 262,144 colors |
| Luminance, White | 400 cd/m ² |
| Power Consumption | Total 5.0 W(Typ.) Logic : 1.1 W (Typ. @ Mosaic), B/L : 3.9 W (Typ. @ VLED 12V) |
| Weight | 230g (Max.) |
| Display Operating Mode | Transmissive mode, normally black |
| Surface Treatment | Anti-Glare treatment of the front Polarizer |
| RoHS Compliance | Yes |
| BFR / PVC / As Free | Yes for all |

Product Specification

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Values | | Units | Notes |
|----------------------------|--------|--------|-----|-------|-------------|
| | | Min | Max | | |
| Power Input Voltage | VCC | -0.3 | 4.0 | Vdc | at 25 ± 5°C |
| Operating Temperature | TOP | 0 | 50 | °C | 1, 2 |
| Storage Temperature | HST | -20 | 60 | °C | 1 |
| Operating Ambient Humidity | HOP | 10 | 90 | %RH | 1 |
| Storage Humidity | HST | 10 | 90 | %RH | 1 |


Note : 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max, and no condensation of water.

2. LCD Surface Temperature Spec :

Panel surface temperature should be under 60 degrees operating at 50 degrees / 2hrs

3. Storage Condition is guaranteed under packing condition.

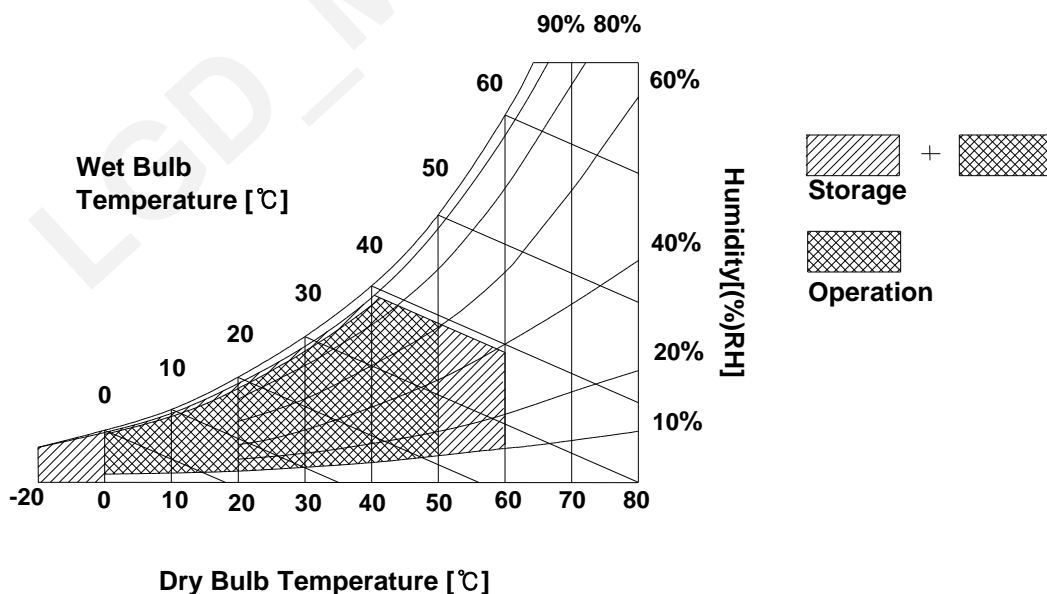

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

The LP125WF2 requires two power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second backlight is the input about LED BL with LED Driver.

Table 2. ELECTRICAL CHARACTERISTICS

| Parameter | | Symbol | Values | | | Unit | Notes |
|--------------------------------|------------|-----------------------|--------|------|------|------|-------|
| | | | Min | Typ | Max | | |
| LOGIC : | | | | | | | |
| Power Supply Input Voltage | | Vcc | 3.0 | 3.3 | 3.6 | V | 1 |
| Power Supply Input Current | Mosaic | Icc | - | 325 | 375 | mA | 2 |
| | Red | Icc | - | 395 | 453 | mA | 2 |
| | Sub-v Line | Icc | - | 530 | 610 | mA | 2 |
| Power Consumption | | Pcc | - | 1.1 | 1.2 | W | 2 |
| Power Supply Inrush Current | | Icc_P | - | - | 1500 | mA | 3 |
| eDP Impedance | | ZLVDS | 90 | 100 | 110 | Ω | 4 |
| BACKLIGHT : (with LED Driver) | | | | | | | |
| LED Power Input Voltage | | VLED | 5.0 | 12.0 | 21.0 | V | 5 |
| LED Power Input Current | | ILED | - | 325 | 335 | mA | 6 |
| LED Power Consumption | | PLED | - | 3.9 | 4.0 | W | 6 |
| LED Power Inrush Current | | ILED_P | - | - | 1500 | mA | 7 |
| PWM Duty Ratio | | | 1 | - | 100 | % | 8 |
| PWM Jitter | | - | 0 | - | 0.2 | % | 9 |
| PWM Impedance | | ZPWM | 20 | 40 | 60 | kΩ | |
| PWM Frequency | | FPWM | 200 | - | 1000 | Hz | 10 |
| PWM High Level Voltage | | V _{PWM_H} | 2.2 | - | 5.3 | V | |
| PWM Low Level Voltage | | V _{PWM_L} | 0 | - | 0.6 | V | |
| LED_EN Impedance | | ZPWM | 20 | 40 | 60 | kΩ | |
| LED_EN High Voltage | | V _{LED_EN_H} | 2.2 | - | 5.3 | V | |
| LED_EN Low Voltage | | V _{LED_EN_L} | 0 | - | 0.6 | V | |
| Life Time | | | 12,000 | - | - | Hrs | 11 |

Product Specification


Note)

1. The measuring position is the connector of LCM and the test conditions are under 25 °C, $f_v = 60\text{Hz}$, Black pattern.

2. The specified I_{cc} current and power consumption are under the $V_{cc} = 3.3\text{V}$, 25 °C, $f_v = 60\text{Hz}$ condition and Mosaic pattern.

2-1. Max Input current (@Sub-V line)


- $V_{cc} 3.3\text{V}$: 610mA
- $V_{cc} 3.0\text{V}$: 680mA

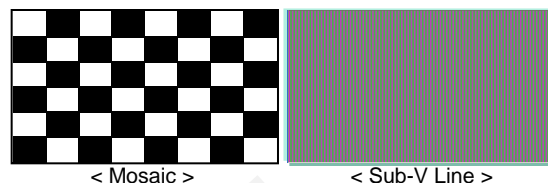

3. This Spec. is the max load condition for the cable impedance designing.

4. The below figures are the measuring V_{cc} condition and the V_{cc} control block LGD used.

The V_{cc} condition is same as the minimum of T1 at Power on sequence.

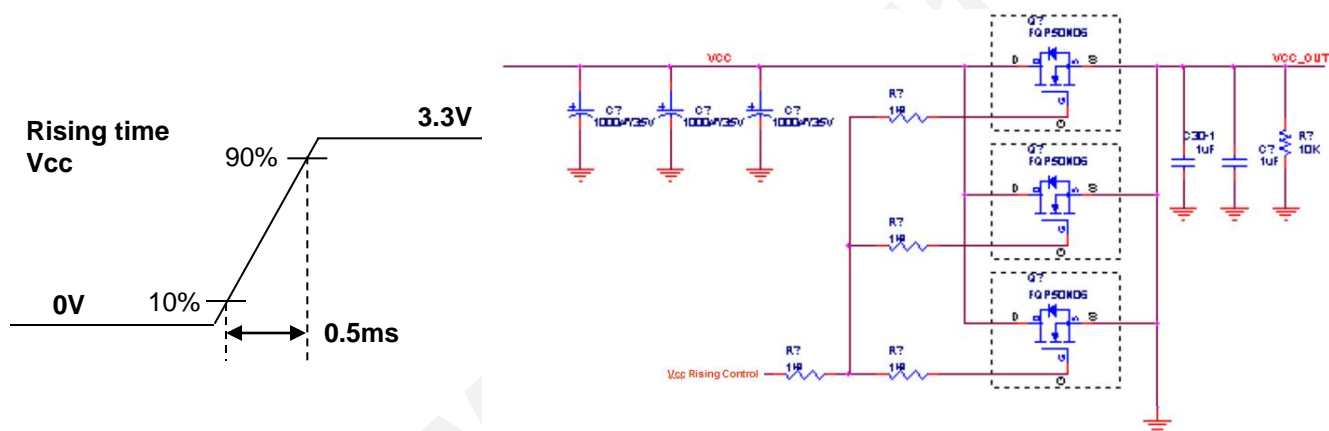


5. This impedance value is needed for proper display and measured from eDP Tx to the mating connector.

6. The measuring position is the connector of LCM and the test conditions are under 25 °C.

7. The current and power consumption with LED Driver are under the $V_{LED} = 12.0\text{V}$, 25 °C, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).

8. The below figures are the measuring V_{LED} condition and the V_{LED} control block LGD used.

V_{LED} control block is same with V_{cc} control block.

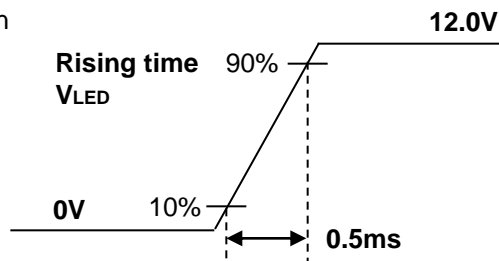

9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.

10. If Jitter of PWM is bigger than maximum, it may induce flickering.

11. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.


12. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in table 7. under general user condition.

Product Specification

3-2. Interface Connections

This LCD employs two interface connections, a 40 pin connector used for the module electronics interface and the other connector used for the integral backlight system.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

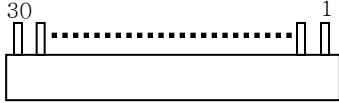
| Pin | Symbol | Description | Notes |
|-----|--------|-------------------------------------|---|
| 1 | NC | No Connection (Reserved for LGD) | [Interface Chip] 1. LCD : Parade, DP643 (LCD Controller Including eDP Receiver). 2. System : TBD or equivalent * Pin to Pin compatible with eDP [Connector] TF12S-6S-0.5SH, HIROSE [Connector pin arrangement]  [LCD Module Rear View] |
| 2 | GND | High Speed (Main Link) Ground | |
| 3 | ML1- | Complement Signal-Lane 1 | |
| 4 | ML1+ | True Signal-Main Lane 1 | |
| 5 | GND | High Speed (Main Link) Ground | |
| 6 | ML0- | Complement Signal-Lane 0 | |
| 7 | ML0+ | True Signal-Main Lane 0 | |
| 8 | GND | High Speed (Main Link) Ground | |
| 9 | AUX+ | True Signal-Auxiliary Channel | |
| 10 | AUX- | Complement Signal-Auxiliary Channel | |
| 11 | GND | High Speed (Main Link) Ground | |
| 12 | VCC | VCC for Module (3.3V) | |
| 13 | VCC | VCC for Module (3.3V) | |
| 14 | NC | No Connection (Reserved for LGD) | |
| 15 | GND | LCM Ground (Logic Ground) | * Pin for PVcom : #24, #25 PVcom Address : 01010000 |
| 16 | GND | LCM Ground (Logic Ground) | |
| 17 | HPD | HPD signal pin | |
| 18 | GND | LCM Ground (LED Backlight Ground) | |
| 19 | GND | LCM Ground (LED Backlight Ground) | |
| 20 | GND | LCM Ground (LED Backlight Ground) | |
| 21 | GND | LCM Ground (LED Backlight Ground) | |
| 22 | LED_EN | LED Backlight On/Off | |
| 23 | PWM | System PWM Signal input for dimming | |
| 24 | NC | No Connection (Reserved for LGD) | |
| 25 | NC | No Connection (Reserved for LGD) | |
| 26 | VLED | LED Backlight Power 5V-21V | |
| 27 | VLED | LED Backlight Power 5V-21V | |
| 28 | VLED | LED Backlight Power 5V-21V | |
| 29 | VLED | LED Backlight Power 5V-21V | |
| 30 | NC | No Connection (Reserved for LGD) | |

Product Specification

3-3. eDP Signal Timing Specifications

3-3-1. DC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.3

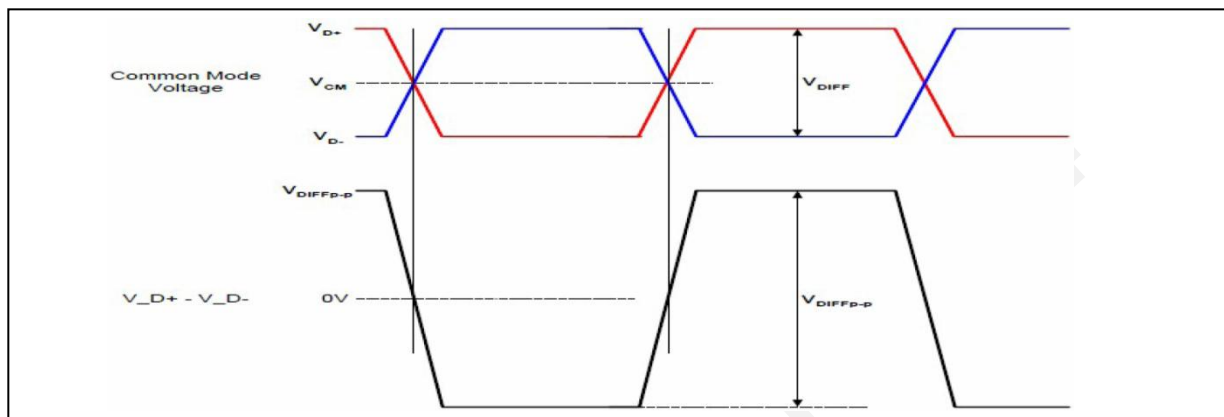

| Description | Symbol | Min | Max | Unit | Notes |
|---|----------------|-----|-----|------|----------------------|
| Differential peak-to-peak Input voltage | $V_{DIFF p-p}$ | 120 | - | mV | For high bit rate |
| | | 40 | - | | For reduced bit rate |
| Rx DC common mode voltage | V_{CM} | 0 | 2.0 | V | - |

3-3-2. AC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.3

| Description | Symbol | Min | Typ | Max | Unit | Notes |
|---|----------------------|-----|-----|------|------|--|
| Unit Interval for high bit rate (2.7Gbps/lane) | UI_High_Rate | - | 370 | - | ps | Range is nominal ± 350 ppm. DisplayPort Link Rx does not require local crystal for link clock generation |
| Unit Interval for high bit rate (1.62Gbps/lane) | UI_Low_Rate | - | 617 | - | ps | |
| Lane-to-Lane skew | V Rx-SKEW-INTER_PAIR | - | - | 5200 | ps | - |
| Lane intra-pair skew | V Rx-SKEW-INTRA_PAIR | - | - | 100 | ps | For high bit rate |
| | | - | - | 300 | ps | For reduced bit rate |

Product Specification

3-4. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of eDP Tx/Rx for its proper operation.

Table 4. TIMING TABLE

| ITEM | Symbol | Min | Typ | Max | Unit | Note |
|-------------|------------------------|-----------|------|--------|------|------|
| DCLK | Frequency | f_{CLK} | - | 138.46 | - | MHz |
| Hsync | Period | t_{HP} | 2090 | 2106 | 2122 | tCLK |
| | Width | t_{WH} | 28 | 32 | 36 | |
| | Width-Active | t_{WHA} | 1920 | 1920 | 1920 | |
| Vsync | Period | t_{VP} | 1090 | 1095 | 1100 | tHP |
| | Width | t_{WV} | 3 | 5 | 7 | |
| | Width-Active | t_{WVA} | 1080 | 1080 | 1080 | |
| Data Enable | Horizontal back porch | t_{HBP} | 102 | 106 | 110 | tCLK |
| | Horizontal front porch | t_{HFP} | 40 | 48 | 56 | |
| | Vertical back porch | t_{VBP} | 5 | 7 | 9 | tHP |
| | Vertical front porch | t_{VFP} | 2 | 3 | 4 | |

Appendix) all reliabilities are specified for timing specification based on refresh rate of 60Hz. However, LP125WF2 has a good actual performance even at lower refresh rate (e.g. 40Hz or 50Hz) for power saving mode, whereas LP125WF2 is secured only for function under lower refresh rate. 60Hz at Normal mode, 50Hz, 40Hz at Power save mode. Don't care Flicker level (power save mode).

3-5. Signal Timing Waveforms

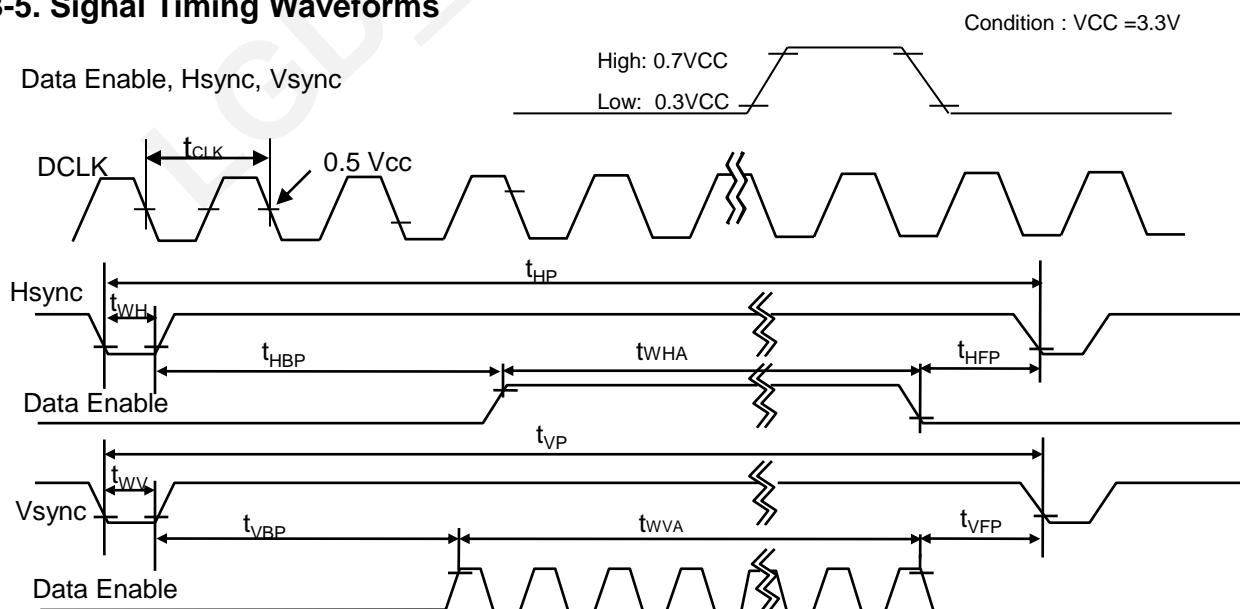

Product Specification
3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 5. COLOR DATA REFERENCE

| Color | | Input Color Data | | | | | | | | | | | | | | | | | |
|-------------|------------|------------------|----|----|-----|----|----|-------|----|----|-----|----|----|------|----|----|-----|----|----|
| | | RED | | | | | | GREEN | | | | | | BLUE | | | | | |
| | | MSB | | | LSB | | | MSB | | | LSB | | | MSB | | | LSB | | |
| | | R5 | R4 | R3 | R2 | R1 | R0 | G5 | G4 | G3 | G2 | G1 | G0 | B5 | B4 | B3 | B2 | B1 | B0 |
| Basic Color | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| RED | RED (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | RED (01) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ... | ... | | | | | | ... | | | | | | ... | | | | | |
| | RED (62) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | RED (63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| GREEN | GREEN (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | GREEN (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ... | ... | | | | | | ... | | | | | | ... | | | | | |
| | GREEN (62) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | GREEN (63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| BLUE | BLUE (00) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | BLUE (01) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | ... | ... | | | | | | ... | | | | | | ... | | | | | |
| | BLUE (62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| | BLUE (63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |

Product Specification

3-7. Power Sequence

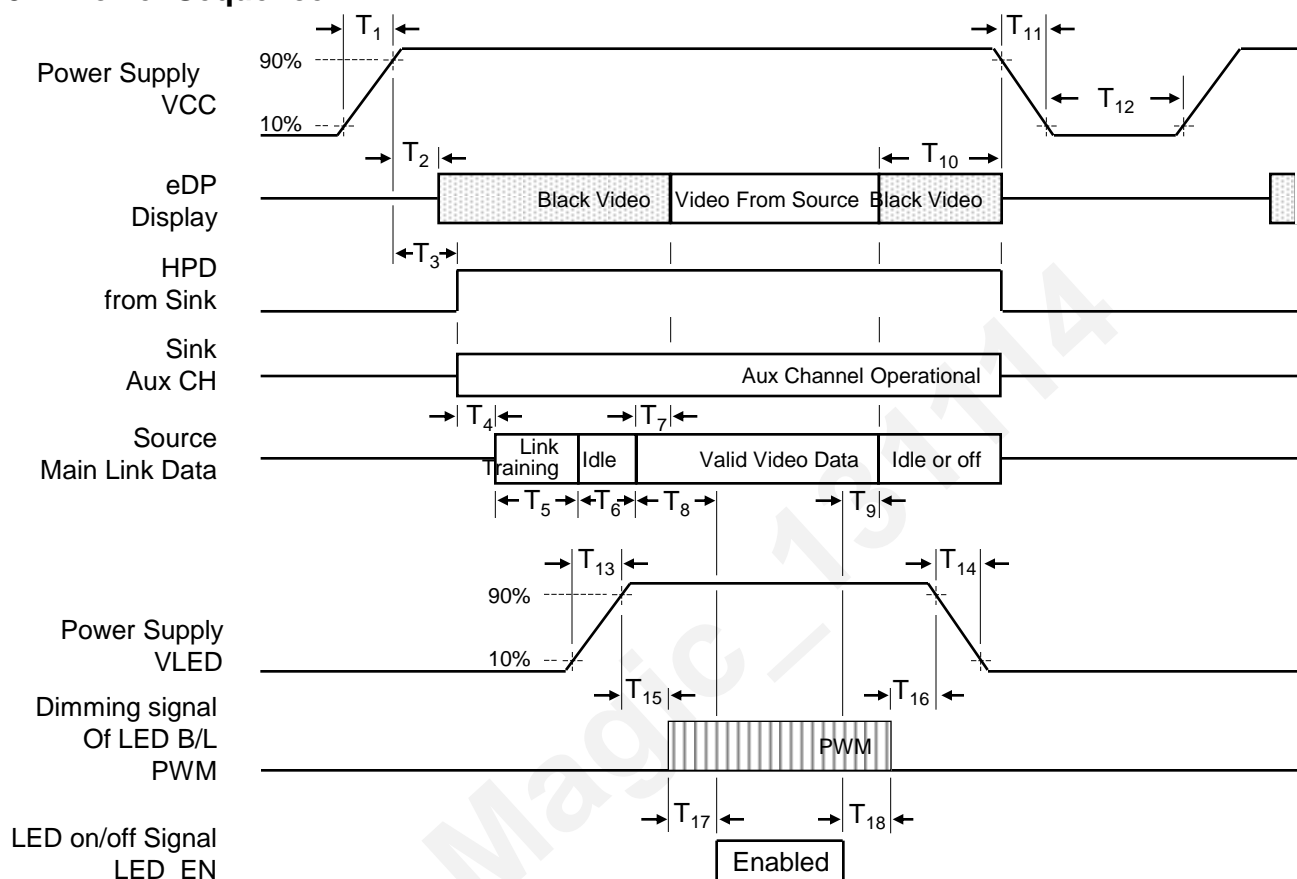


Table 6. POWER SEQUENCE TABLE

| Timing | Required By | Limits | | Units | Notes |
|----------------|-------------|--------|-----|-------|----------------------------|
| | | Min | Max | | |
| T ₁ | Source | 0.5 | 10 | ms | - |
| T ₂ | Sink | 0 | 200 | ms | - |
| T ₃ | Sink | 0 | 200 | ms | - |
| T ₄ | Source | - | - | ms | - |
| T ₅ | Source | - | - | ms | - |
| T ₆ | Source | - | - | ms | - |
| T ₇ | Sink | 0 | 50 | ms | - |
| T ₈ | Source | - | - | ms | LGD recommend Min 200ms |
| T ₉ | Source | - | - | ms | - |

| Timing | Required By | Limits | | Units | Notes |
|-----------------|-------------|--------|------|-------|-----------------------------|
| | | Min | Max | | |
| T ₁₀ | Source | 0 | 500 | ms | - |
| T ₁₁ | Source | - | 10 | ms | - |
| T ₁₂ | Source | 150 | - | ms | VESA recommend Min 500ms |
| T ₁₃ | Source | 0.5 | 10 | ms | - |
| T ₁₄ | Source | 0 | 5000 | ms | - |
| T ₁₅ | Source | 0 | - | ms | - |
| T ₁₆ | Source | 0 | - | ms | - |
| T ₁₇ | Source | 0 | - | ms | - |
| T ₁₈ | Source | 0 | - | ms | - |

- Note) 1. Do not insert the mating cable when system turn on.
 2. Valid Data have to meet "3-3. eDP Signal Timing Specifications"
 3. Video Signal, LED_EN and PWM need to be on pull-down condition on invalid status.
 4. LGD recommend the rising sequence of VLED after the Vcc and valid status of Video Signal turn on.

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 20 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

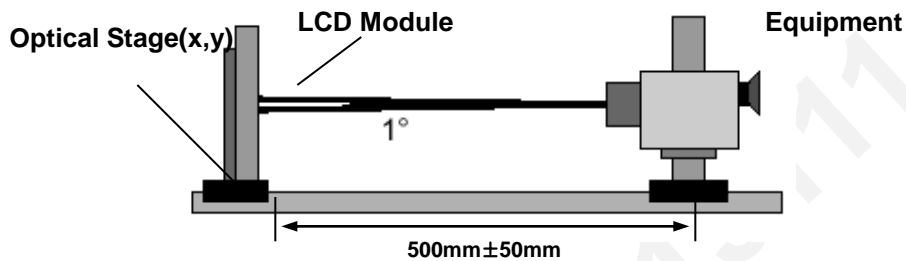


Table 7. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 138.46 MHz

| Parameter | Symbol | Values | | | Units | Notes |
|-----------------------------------|-----------------------|--------|-------|-------|-------------------|---------|
| | | Min | Typ | Max | | |
| Contrast Ratio | CR | 600 | 700 | - | | 1 |
| Surface Luminance, white | L_{WH} | 320 | 400 | - | cd/m ² | 2 |
| Luminance Variation | $\delta_{WHITE(5p)}$ | - | | 1.25 | - | 3 |
| | $\delta_{WHITE(13p)}$ | - | 1.4 | 1.6 | | |
| Response Time (W to B) | $Tr_R + Tr_D$ | - | 35 | 50 | ms | 4 |
| Color Coordinates | | | | | | |
| RED | RX | 0.574 | 0.604 | 0.634 | | 5 |
| | RY | 0.321 | 0.351 | 0.381 | | |
| GREEN | GX | 0.305 | 0.335 | 0.365 | | |
| | GY | 0.528 | 0.558 | 0.588 | | |
| BLUE | BX | 0.118 | 0.148 | 0.178 | | |
| | BY | 0.083 | 0.113 | 0.143 | | |
| WHITE | WX | 0.283 | 0.313 | 0.343 | | |
| | WY | 0.299 | 0.329 | 0.359 | | |
| Viewing Angle | | | | | | |
| x axis, right($\Phi=0^\circ$) | Θ_r | 80 | - | - | degree | CR ≥ 10 |
| x axis, left ($\Phi=180^\circ$) | Θ_l | 80 | - | - | degree | |
| y axis, up ($\Phi=90^\circ$) | Θ_u | 80 | - | - | degree | |
| y axis, down ($\Phi=270^\circ$) | Θ_d | 80 | - | - | degree | |
| Gray Scale | | | | | | 6 |
| Color Gamut | % | - | 50 | - | | |

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$\text{LWH} = \text{Average}(\text{L1}, \text{L2}, \dots \text{L5})$$

3. The variation in surface luminance , The panel total variation (WHITE) is determined by measuring LN at each test position 1 through 13 and then defined as followed numerical formula.
For more information see FIG 2.

$$\text{WHITE_5P} = \frac{\text{Maximum}(\text{L1}, \text{L2}, \dots \text{L5})}{\text{Minimum}(\text{L1}, \text{L2}, \dots \text{L5})}$$

$$\text{WHITE_13P} = \frac{\text{Maximum}(\text{L1}, \text{L2}, \dots \text{L13})}{\text{Minimum}(\text{L1}, \text{L2}, \dots \text{L13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, TrR) and from black to white(Decay Time, TrD). For additional information see FIG 3.
5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.
6. Gray scale specification * fV = 60Hz

| Gray Level | Luminance [%] (Typ) |
|------------|---------------------|
| L0 | 0.16 |
| L31 | 0.97 |
| L63 | 4.26 |
| L95 | 10.5 |
| L127 | 19.8 |
| L159 | 33.6 |
| L191 | 52.1 |
| L223 | 74.8 |
| L255 | 100 |

Product Specification

FIG. 2 Luminance

<Measuring point for Average Luminance & measuring point for Luminance variation>

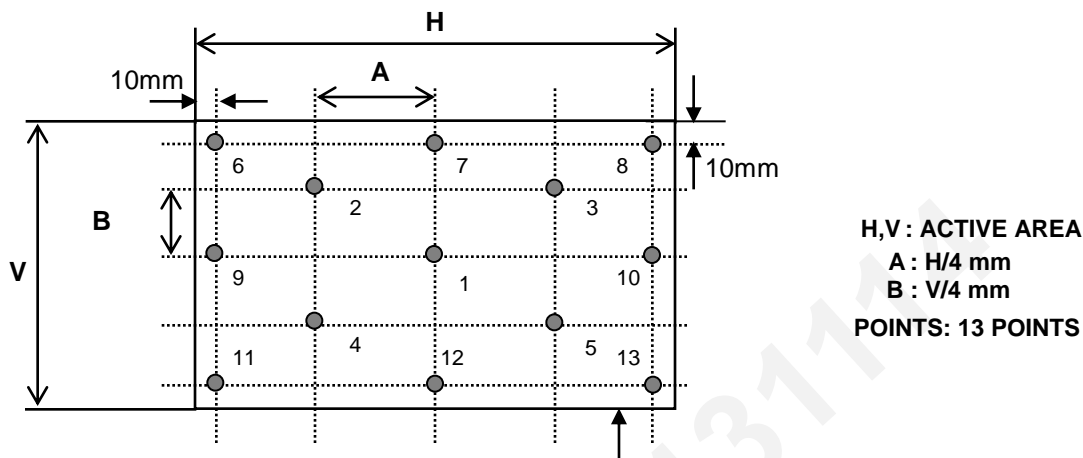


FIG. 3 Response Time

Active Area

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".


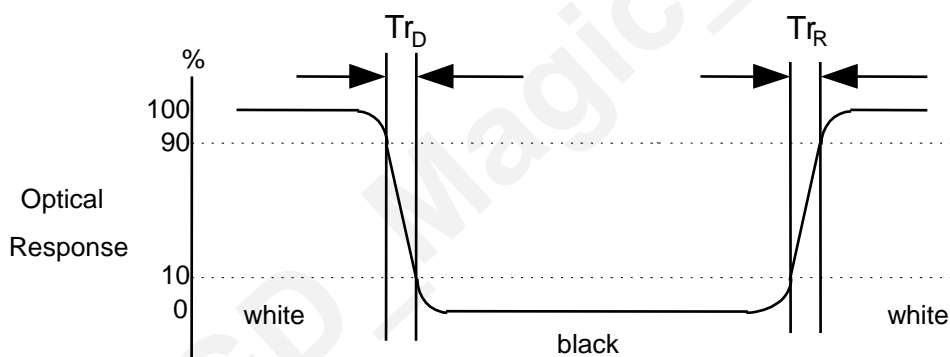


FIG. 4 Viewing angle

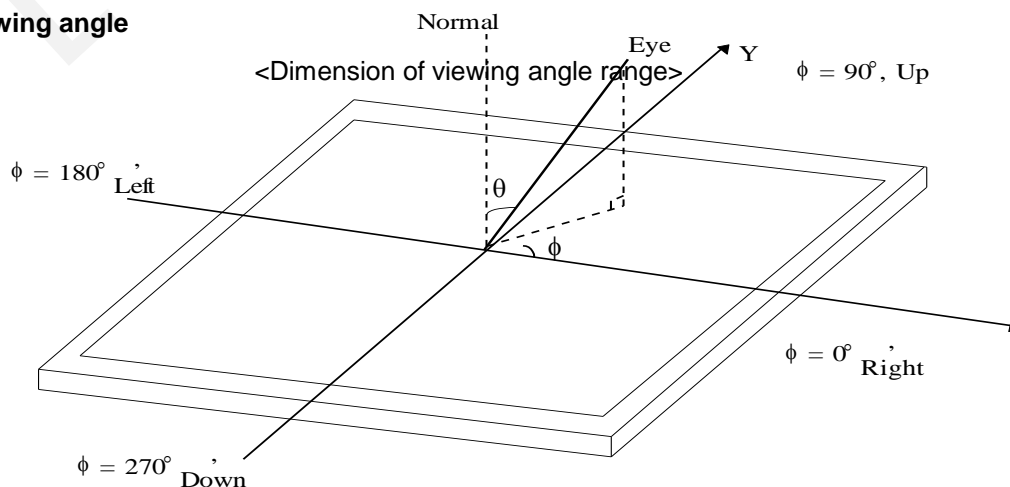

Product Specification

5. Mechanical Characteristics


The contents provide general mechanical characteristics for the model LP125WF2. In addition the figures in the next page are detailed mechanical drawing of the LCD.

| | | |
|---------------------|---|----------------|
| Outline Dimension | Horizontal | 290.5 ± 0.5mm |
| | Vertical | 170.7 ± 0.5mm |
| | Thickness | 2.85mm (max) |
| Bezel Area | Horizontal | 278.48 ± 0.5mm |
| | Vertical | 157.52 ± 0.5mm |
| Active Display Area | Horizontal | 276.480mm |
| | Vertical | 155.520 mm |
| Weight | 230g (Max.) | |
| Surface Treatment | Anti-Glare treatment of the front polarizer | |

Product Specification


<FRONT VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

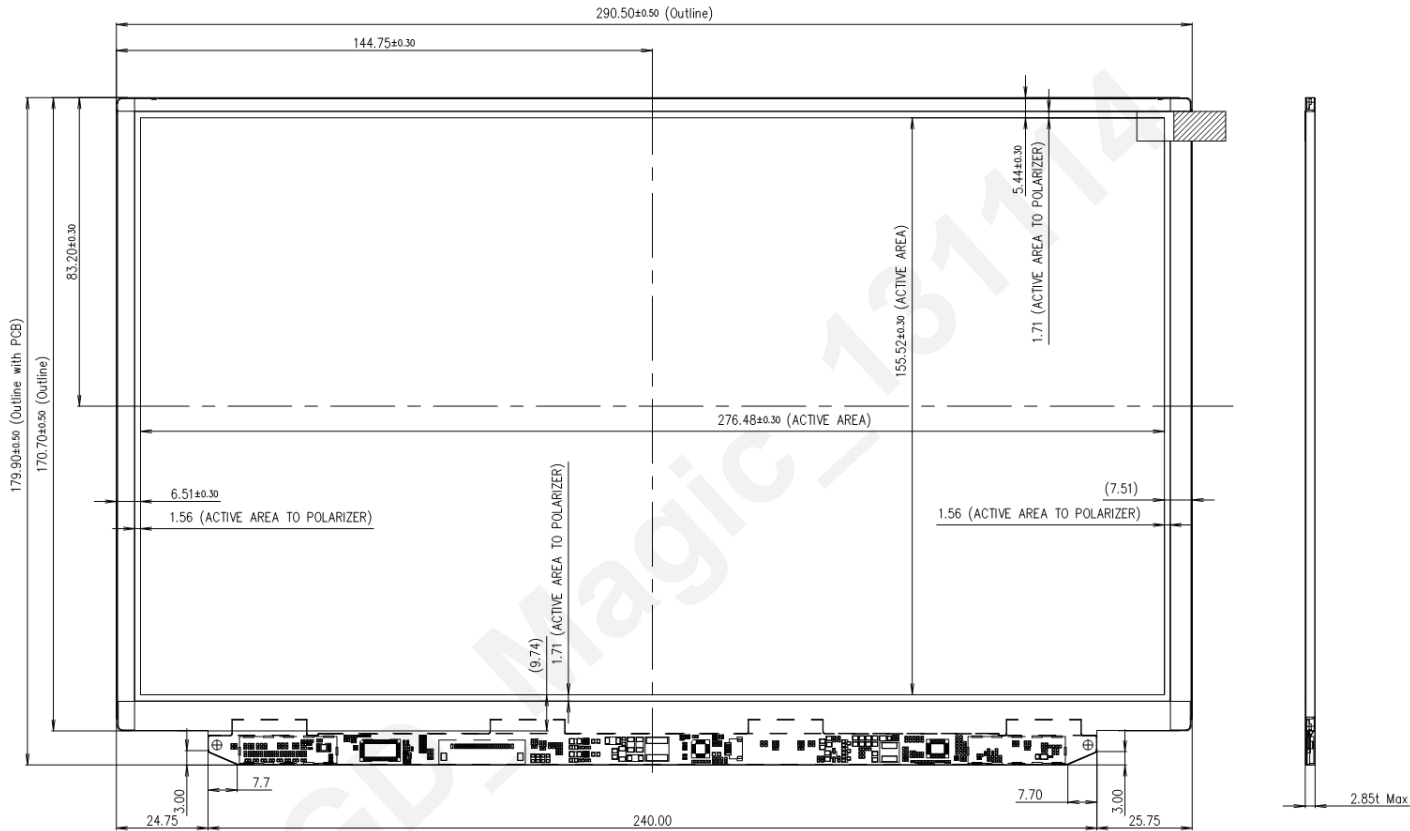

<REAR VIEW>

Note) Unit:[mm], General tolerance: $\pm 0.5\text{mm}$

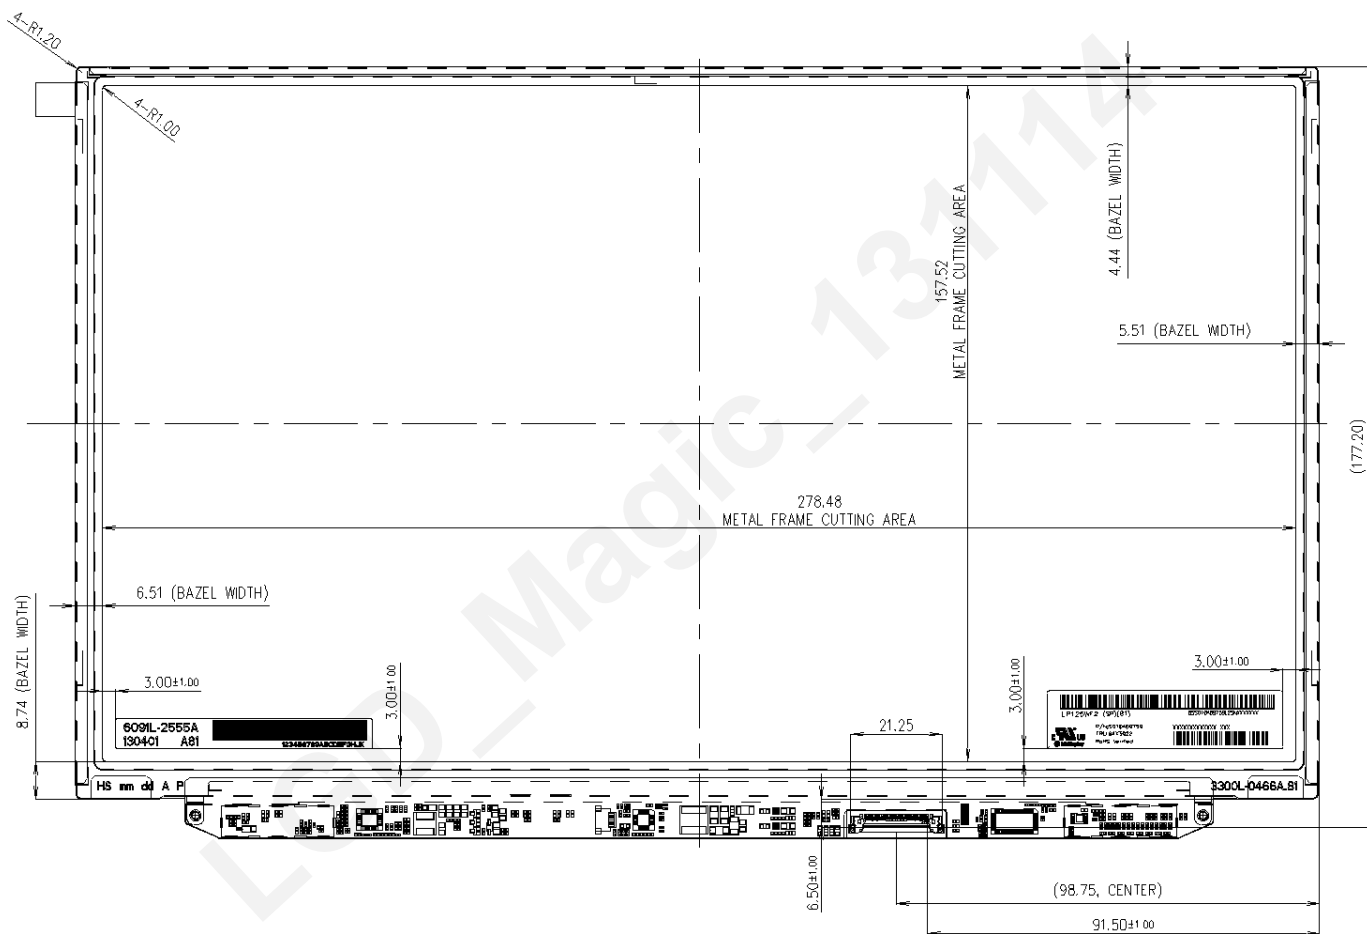

Product Specification

6. Reliability

Environment test condition

| No. | Test Item | Conditions |
|-----|---|---|
| 1 | High temperature storage test | Ta= 60°C, 240h |
| 2 | Low temperature storage test | Ta= -20°C, 240h |
| 3 | High temperature operation test | Ta= 50°C, 50%RH, 240h |
| 4 | Low temperature operation test | Ta= 0°C, 240h |
| 5 | Vibration test (non-operating) | Sine wave, 5 ~ 150Hz, 1.5G, 0.37oct/min 3 axis, 30min/axis |
| 6 | Shock test (non-operating) | <ul style="list-style-type: none"> - No functional or cosmetic defects following a shock to all 6 sides delivering at least 180 G in a half sine pulse no longer than 2 ms to the display module - No functional defects following a shock delivering at least 200 g in a half sine pulse no longer than 2 ms to each of 6 sides. Each of the 6 sides will be shock tested with one each display, for a total of 6 displays |
| 7 | Altitude operating storage / shipment | 0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr |

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

- a) UL 60950-1, Underwriters Laboratories Inc.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA-C22.2 No. 60950-1-07, Canadian Standards Association.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1, European Committee for Electrotechnical Standardization (CENELEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1, The International Electrotechnical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements

7-2. Environment

- a) RoHS, Directive 2011/65/EU of the European Parliament and of the council of 8 June 2011

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | B | C | D | E | F | G | H | I | J | K | L | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|

A,B,C : SIZE(INCH)
E : MONTH

D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

| Year | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 |
|------|------|------|------|------|------|------|------|------|------|------|
| Mark | A | B | C | D | E | F | G | H | J | K |

2. MONTH

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Mark | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C |

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 30pcs

b) Box Size : 478mm X 365mm X 244mm

Product Specification

8-3. Label Description

Model Name



LP125WF2 (SP)(B1) 8SSD10A09759L2SNXXXXXX

Lenovo CODE



P/N:SD10A09759

FRU:04X3922


RoHS Verified

XXXXXXXXXXXX XXX



LGD CODE

LGD Code

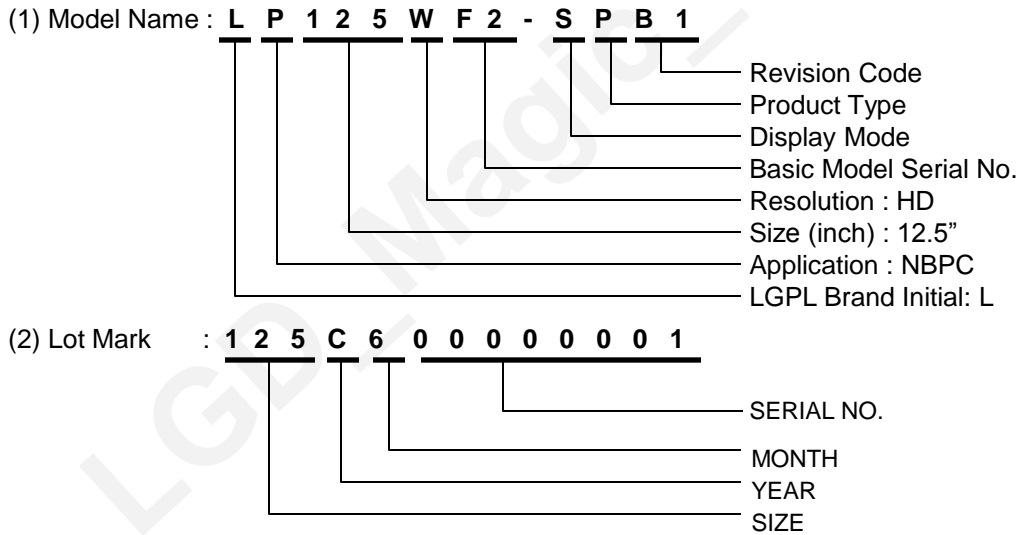

Lenovo Code

- 1)P/N : SD10A09759
- 2)FRU : 04X3922

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.
- (10) When handling the LCD module, it needs to handle with care not to give mechanical stress to the PCB and Mounting Hole area."

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Product Specification
APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

| | Byte (Dec) | Byte (Hex) | Field Name and Comments | Value (Hex) | Value (Bin) |
|--|---------------|---------------|---|----------------|----------------|
| Header | 0 | 00 | Header | 00 | 00000000 |
| | 1 | 01 | Header | FF | 11111111 |
| | 2 | 02 | Header | FF | 11111111 |
| | 3 | 03 | Header | FF | 11111111 |
| | 4 | 04 | Header | FF | 11111111 |
| | 5 | 05 | Header | FF | 11111111 |
| | 6 | 06 | Header | FF | 11111111 |
| Vendor / Product EDID Version | 7 | 07 | Header | 00 | 00000000 |
| | 8 | 08 | ID Manufacture Name LGD | 30 | 00110000 |
| | 9 | 09 | ID Manufacture Name | E4 | 11100100 |
| | 10 | 0A | ID Product Code 0414h | 14 | 00010100 |
| | 11 | 0B | (Hex, LSB first) | 04 | 00000100 |
| | 12 | 0C | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First) | 00 | 00000000 |
| | 13 | 0D | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First) | 00 | 00000000 |
| | 14 | 0E | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First) | 00 | 00000000 |
| | 15 | 0F | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First) | 00 | 00000000 |
| | 16 | 10 | Week of Manufacture - Optional 00 weeks | 00 | 00000000 |
| | 17 | 11 | Year of Manufacture 2013 years | 17 | 00010111 |
| | 18 | 12 | EDID structure version # = 1 | 01 | 00000001 |
| Display Parameters | 19 | 13 | EDID revision # = 4 | 04 | 00000100 |
| | 20 | 14 | Video input Definition = Input is a Digital Video signal Interface , Colo Bit Depth : 6 Bits per Primary Color , Digital Video Interface Standard Supported: DisplayPort is supported | 95 | 10010101 |
| | 21 | 15 | Horizontal Screen Size (Rounded cm) = 28 cm | 1C | 00011100 |
| | 22 | 16 | Vertical Screen Size (Rounded cm) = 16 cm | 10 | 00010000 |
| | 23 | 17 | Display Transfer Characteristic (Gamma) = (gamma*100)-100 = Example:(2.2*100)-100=120 | 78 | 01111000 |
| Panel Color Coordinates | 24 | 18 | Feature Support [Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported ,Supported Color Encoding Formats : RGB 4:4:4 ,Other Feature Support Flags : No_sRGB, Preferred Timing Mode, No_Display is continuous frequency (Multi-mode_Base EDID and Extension Block).] | 02 | 00000010 |
| | 25 | 19 | Red/Green Low Bits (RxRy/GxGy) | B5 | 10110101 |
| | 26 | 1A | Blue/White Low Bits (BxBY/WxWy) | 45 | 01000101 |
| | 27 | 1B | Red X Rx = 0.60 | 99 | 10011001 |
| | 28 | 1C | Red Y Ry = 0.351 | 59 | 01011001 |
| | 29 | 1D | Green X Gx = 0.341 | 57 | 01010111 |
| | 30 | 1E | Green Y Gy = 0.567 | 91 | 10010001 |
| | 31 | 1F | Blue X Bx = 0.153 | 27 | 00100111 |
| | 32 | 20 | Blue Y By = 0.121 | 1F | 00011111 |
| | 33 | 21 | White X Wx = 0.313 | 50 | 01010000 |
| Established Timings | 34 | 22 | White Y Wy = 0.329 | 54 | 01010100 |
| | 35 | 23 | Established timing 1 (Optional_00h if not used) | 00 | 00000000 |
| | 36 | 24 | Established timing 2 (Optional_00h if not used) | 00 | 00000000 |
| Standard Timing ID | 37 | 25 | Manufacturer's timings (Optional_00h if not used) | 00 | 00000000 |
| | 38 | 26 | Standard timing ID1 (Optional_01h if not used) | 01 | 00000001 |
| | 39 | 27 | Standard timing ID1 (Optional_01h if not used) | 01 | 00000001 |
| | 40 | 28 | Standard timing ID2 (Optional_01h if not used) | 01 | 00000001 |
| | 41 | 29 | Standard timing ID2 (Optional_01h if not used) | 01 | 00000001 |
| | 42 | 2A | Standard timing ID3 (Optional_01h if not used) | 01 | 00000001 |
| | 43 | 2B | Standard timing ID3 (Optional_01h if not used) | 01 | 00000001 |
| | 44 | 2C | Standard timing ID4 (Optional_01h if not used) | 01 | 00000001 |
| | 45 | 2D | Standard timing ID4 (Optional_01h if not used) | 01 | 00000001 |
| | 46 | 2E | Standard timing ID5 (Optional_01h if not used) | 01 | 00000001 |
| | 47 | 2F | Standard timing ID5 (Optional_01h if not used) | 01 | 00000001 |
| | 48 | 30 | Standard timing ID6 (Optional_01h if not used) | 01 | 00000001 |
| | 49 | 31 | Standard timing ID6 (Optional_01h if not used) | 01 | 00000001 |
| | 50 | 32 | Standard timing ID7 (Optional_01h if not used) | 01 | 00000001 |
| | 51 | 33 | Standard timing ID7 (Optional_01h if not used) | 01 | 00000001 |
| | 52 | 34 | Standard timing ID8 (Optional_01h if not used) | 01 | 00000001 |
| | 53 | 35 | Standard timing ID8 (Optional_01h if not used) | 01 | 00000001 |

Product Specification
APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3


| | Byte (Dec) | Byte (Hex) | Field Name and Comments | Value (Hex) | Value (Bin) |
|-----------------------------|---------------|---------------|---|----------------|----------------|
| Timing Descriptor #1 | 54 | 36 | Pixel Clock/10,000 (LSB) 138.46 MHz @ 60 Hz | 16 | 00010110 |
| | 55 | 37 | Pixel Clock/10,000 (MSB) | 36 | 00110110 |
| | 56 | 38 | Horizontal Active (HA) (lower 8 bits) 1920 pixels | 80 | 10000000 |
| | 57 | 39 | Horizontal Blanking (HB) (lower 8 bits) 186 pixels | BA | 10111010 |
| | 58 | 3A | Horizontal Active (HA) / Horizontal Blanking (HB) (upper 4:4bits) | 70 | 01110000 |
| | 59 | 3B | Vertical Active (VA) 1080 lines | 38 | 00111000 |
| | 60 | 3C | Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 15 lines | 0F | 00001111 |
| | 61 | 3D | Vertical Active (VA) / Vertical Blanking (VB) (upper 4:4bits) | 40 | 01000000 |
| | 62 | 3E | Horizontal Front Porch in pixels (HF) (lower 8 bits) 48 pixels | 30 | 00110000 |
| | 63 | 3F | Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 32 pixels | 20 | 00100000 |
| | 64 | 40 | Vertical Front Porch in lines (VF) : Vertical Sync Pluse Width in lines (VS) (lower 4 bits) 3 lines : 5 lines | 35 | 00110101 |
| | 65 | 41 | Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits) | 00 | 00000000 |
| | 66 | 42 | Horizontal Vedio Image Size (mm) (lower 8 bits) 276 mm | 14 | 00010100 |
| | 67 | 43 | Vertical Vedio Image Size (mm) (lower 8 bits) 156 mm | 9C | 10011100 |
| | 68 | 44 | Horizontal Image Size / Vertical Image Size (upper 4 bits) | 10 | 00010000 |
| | 69 | 45 | Horizontal Border = 0 (Zero for Notebook LCD) | 00 | 00000000 |
| Timing Descriptor #2 | 70 | 46 | Vertical Border = 0 (Zero for Notebook LCD) | 00 | 00000000 |
| | 71 | 47 | Non-Interlace, Normal display, no stereo, Digital Separate [Vsync_NEG, Hsync_POS (outside of V-sync)] | 1A | 00011010 |
| | 72 | 48 | Flag | 00 | 00000000 |
| | 73 | 49 | Flag | 00 | 00000000 |
| | 74 | 4A | Flag | 00 | 00000000 |
| | 75 | 4B | Data Type Tag (Descriptor Defined by manufacturer) | 00 | 00000000 |
| | 76 | 4C | Flag | 00 | 00000000 |
| | 77 | 4D | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 78 | 4E | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 79 | 4F | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 80 | 50 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 81 | 51 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 82 | 52 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 83 | 53 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 84 | 54 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 85 | 55 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 86 | 56 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 87 | 57 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 88 | 58 | Descriptor Defined by manufacturer | 00 | 00000000 |
| | 89 | 59 | Descriptor Defined by manufacturer | 00 | 00000000 |
| Timing Descriptor #3 | 90 | 5A | Flag | 00 | 00000000 |
| | 91 | 5B | Flag | 00 | 00000000 |
| | 92 | 5C | Flag | 00 | 00000000 |
| | 93 | 5D | Data Type Tag (Alphanumeric Data String (ASCII String)) | FE | 11111110 |
| | 94 | 5E | Flag | 00 | 00000000 |
| | 95 | 5F | Alphanumeric Data String (ASCII String) L | 4C | 01001100 |
| | 96 | 60 | Alphanumeric Data String (ASCII String) G | 47 | 01000111 |
| | 97 | 61 | Alphanumeric Data String (ASCII String) | 20 | 00100000 |
| | 98 | 62 | Alphanumeric Data String (ASCII String) D | 44 | 01000100 |
| | 99 | 63 | Alphanumeric Data String (ASCII String) i | 69 | 01101001 |
| | 100 | 64 | Alphanumeric Data String (ASCII String) s | 73 | 01110011 |
| | 101 | 65 | Alphanumeric Data String (ASCII String) p | 70 | 01110000 |
| | 102 | 66 | Alphanumeric Data String (ASCII String) l | 6C | 01101100 |
| | 103 | 67 | Alphanumeric Data String (ASCII String) a | 61 | 01100001 |
| | 104 | 68 | Alphanumeric Data String (ASCII String) y | 79 | 01111001 |
| | 105 | 69 | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h) | 0A | 00001010 |
| | 106 | 6A | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h) | 20 | 00100000 |
| | 107 | 6B | Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h) | 20 | 00100000 |

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

| | Byte (Dec) | Byte (Hex) | Field Name and Comments | Value (Hex) | Value (Bin) |
|-----------------------------|---------------|---------------|--|----------------|----------------|
| Timing Descriptor #4 | 108 | 6C | Flag | 00 | 00000000 |
| | 109 | 6D | Flag | 00 | 00000000 |
| | 110 | 6E | Flag | 00 | 00000000 |
| | 111 | 6F | Data Type Tag (Alphanumeric Data String (ASCII String)) | FE | 11111110 |
| | 112 | 70 | Flag | 00 | 00000000 |
| | 113 | 71 | Alphanumeric Data String (ASCII String) L | 4C | 01001100 |
| | 114 | 72 | Alphanumeric Data String (ASCII String) P | 50 | 01010000 |
| | 115 | 73 | Alphanumeric Data String (ASCII String) 1 | 31 | 00110001 |
| | 116 | 74 | Alphanumeric Data String (ASCII String) 2 | 32 | 00110010 |
| | 117 | 75 | Alphanumeric Data String (ASCII String) 5 | 35 | 00110101 |
| | 118 | 76 | Alphanumeric Data String (ASCII String) W | 57 | 01010111 |
| | 119 | 77 | Alphanumeric Data String (ASCII String) F | 46 | 01000110 |
| | 120 | 78 | Alphanumeric Data String (ASCII String) 2 | 32 | 00110010 |
| | 121 | 79 | Alphanumeric Data String (ASCII String) - | 2D | 00101101 |
| | 122 | 7A | Alphanumeric Data String (ASCII String) S | 53 | 01010011 |
| | 123 | 7B | Alphanumeric Data String (ASCII String) P | 50 | 01010000 |
| | 124 | 7C | Alphanumeric Data String (ASCII String) B | 42 | 01000010 |
| | 125 | 7D | Alphanumeric Data String (ASCII String) 1 | 31 | 00110001 |
| Checksum | 126 | 7E | Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0) | 00 | 00000000 |
| | 127 | 7F | Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0) | C4 | 11000100 |

Our company network supports you worldwide with offices in Germany, Great Britain, Italy, Turkey and the USA. For more information please contact:

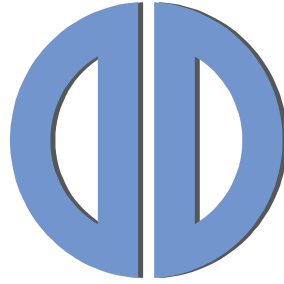

DATA DISPLAY GROUP

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom

Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1 Ronkonkoma, NY
11779

United States of America

Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com

Sales Partner:

REM Italy s.a.s.

di Michieletto Flavio & C.
Via Obbia Bassa, 10
I-35010 Trebaseleghe (PD)
Italy
Phone: +39 335 521 37 89
E-Mail: info@remitaly.com
Internet: www.remitaly.com

Sales Partner:

DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ

Barbaros Mh Ak Zamabak Sk A Blok
D:143 Ataşehir/İstanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr