



OUR GLOBAL  
COMPETENCE  
CENTRES

 APOLLO DISPLAY  
TECHNOLOGIES



 DISTEC



 DISPLAY  
TECHNOLOGY



# Datasheet

## Distec

### POS-IQ-156-01-PRO

15.6" Monitor with x86

MO-06-101



Version 1.3

13.09.2023

## Table of Contents

1	Revision History .....	4
2	Description .....	5
3	Characteristics .....	6
3.1	Interfaces .....	6
4	Mechanical Drawing .....	7
5	Optional Accessories .....	8
5.1	Overview .....	8
5.2	Mounting Frame .....	9
5.2.1	Mounting instruction .....	9

## 1 Revision History

Date	Rev.No.	Description	Page
10.12.2019	0.1	Preliminary Version	All
08.07.2020	0.2	Storage temperature changed from -20°C - +60°C to <b>0°C - +60°C</b> , updated last page	6, 11
12.08.2020	0.3	Nominal Input Voltage changed from 12 to <b>9-36V</b>	6
14.01.2021	0.4	Revised description, order of characteristics and new cover/last page	5, 6
16.07.2021	1.0	<b>Release Version;</b> Software Flyer added	5
27.07.2021	1.1	New Template	all
08.09.2021	1.3	Optional Accessories: Overview	8
13.09.2023	1.4	12-24V	5-6

## 2 Description

Distec's 15.6" POS-IQ-156-01-PRO is a CE certified/IP65 proof front monitor solution, powered with an integrated State-of-the-Art embedded PC. Therefore, it is the perfect platform for high-performance visualization projects.

Its robust but slim cover offers all options for integration and various applications. The POS-IQ-156-01-PRO is equipped with an industrial high-brightness display and is designed for long term availability.

### The POS-IQ Series features:

- an integrated 10 finger PCAP touchscreen
- an ambient light sensor for automatic brightness adjustment to ambient light conditions
- integrated passive cooling, which allows operating the system under full load even at high ambient temperatures
- VESA Mounting holes for using it as an HMI, mounted on a swivel arm or monitor stand
- As Option: in-wall mounting frame for a variety of integrations in concrete, wooden, or drywall constructions

### The integrated IPC offers all advantages of a modern 64bit x86 PC:

- High performance for a passive system due to an Intel® Pentium® N4200 processor
- Dual Gigabit Ethernet, 4 x USB 3.0
- HDMI 1.4b, DisplayPort 1.2 and RS-232/422/485 interfaces
- 4GB highspeed RAM and an industrial grade SSD with 64GB memory
- driven by single 12V-24V power supply
- *As Option:* Wireless - or Bluetooth adapters to be connected via LAN or USB

### Available Software:


The POS-IQ-PRO series is shipped with Windows 10 embedded off the shelf. Of course the device can be used with different operation systems and various application software can be installed.

More details regarding available application software and operating systems can be found in the [flyer](#).

### 3 Characteristics

Items	Unit	Specification
Screen Diagonal	[inch]	15.6
Pixels H x V		1920 x 1080
Supported Colors		16.2M(6bit color+ FRC)
Brightness	[cd/m <sup>2</sup> ]	300
Viewing Angle	v/h	89/89/89/89
Nominal Input Voltage	[V]	12-24
Typical Power Consumption	[W]	19.4
Memory	GB	4
SSD	GB	64
Electrical Interface		2 x Gbit LAN, 4 x USB 3.0, HDMI, DisplayPort, 1 x RS-232/422/485
PCAP Touchscreen Touchpoints	finger	10
Storage Temperature	[°C]	0 to +60
Operating Temperature Range	[°C]	0 to +50
IP rating		Front IP65
Physical Size H x V x D	[mm]	367 x 233 x 49
Active Area H x V	[mm]	344.16 x 193.59
Weight	[kg]	3.2

#### 3.1 Interfaces

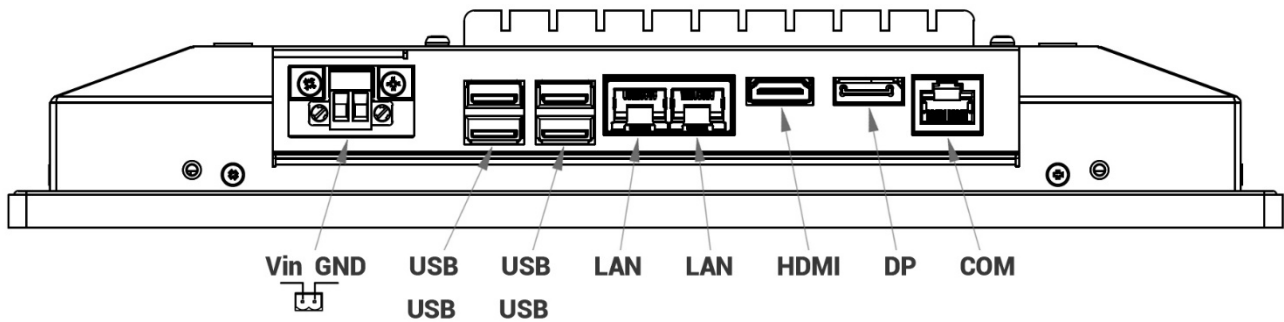




## 5 Optional Accessories

### 5.1 Overview


<b>Mounting</b>		
In-Wall Mounting Frame	MK-06-007	POS-IQ-156-01-PRO In-Wall mounting Frame
<b>Power Supply Unit</b>		
PSU 12V/5A	NT-01-062	AC Adapter CWT KPL-060F-VI(C14/12V5A)2,1
Power Cord EU	DB-07-225	IEC PowerCord (EU-C13) 3x0,75 black 1,8m
Power Cord UK	DB-07-226	Power Cord (UK - C13) black 1,8m
Power Cord USA	DB-07-238	Power Cord (US-C13) black 1,8m/6 feet
<b>Other</b>		
WiFi	PC-05-071	DELOCK 12462 WLAN Stick/Antenna USB 2.0



## 5.2 Mounting Frame

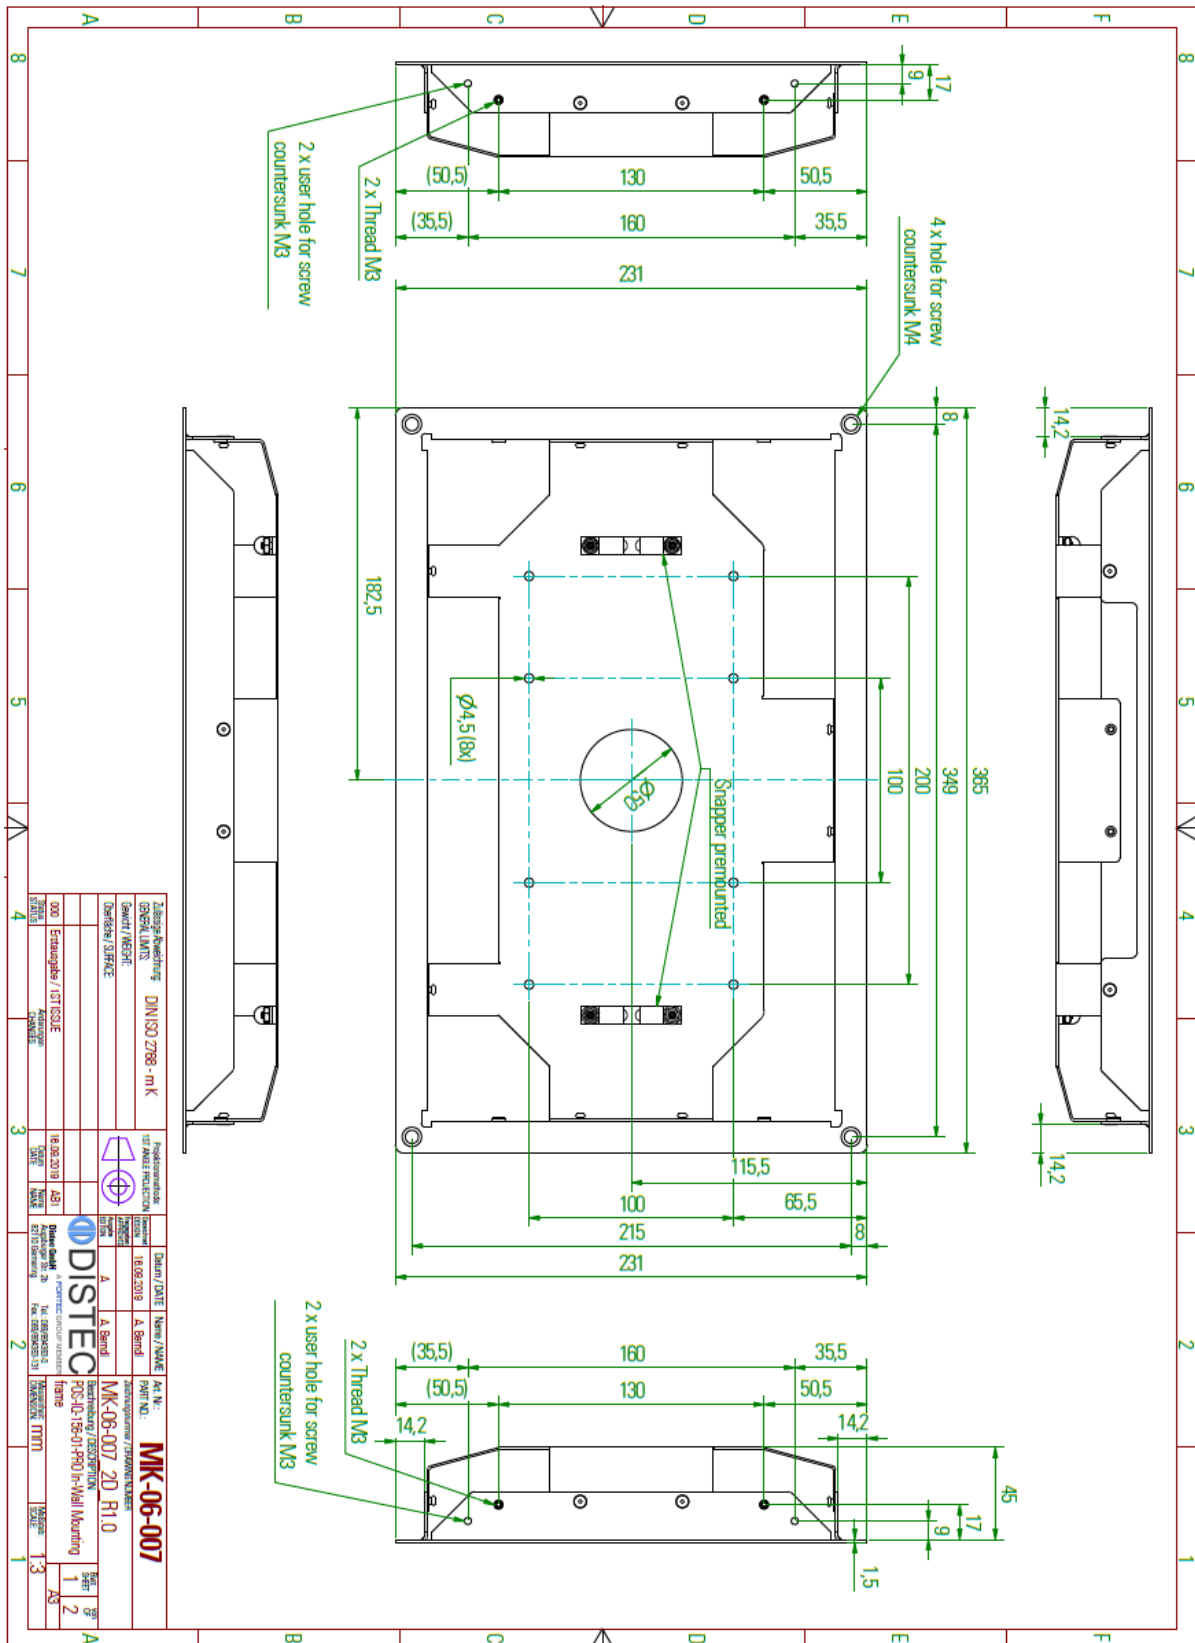

### 5.2.1 Mounting instruction

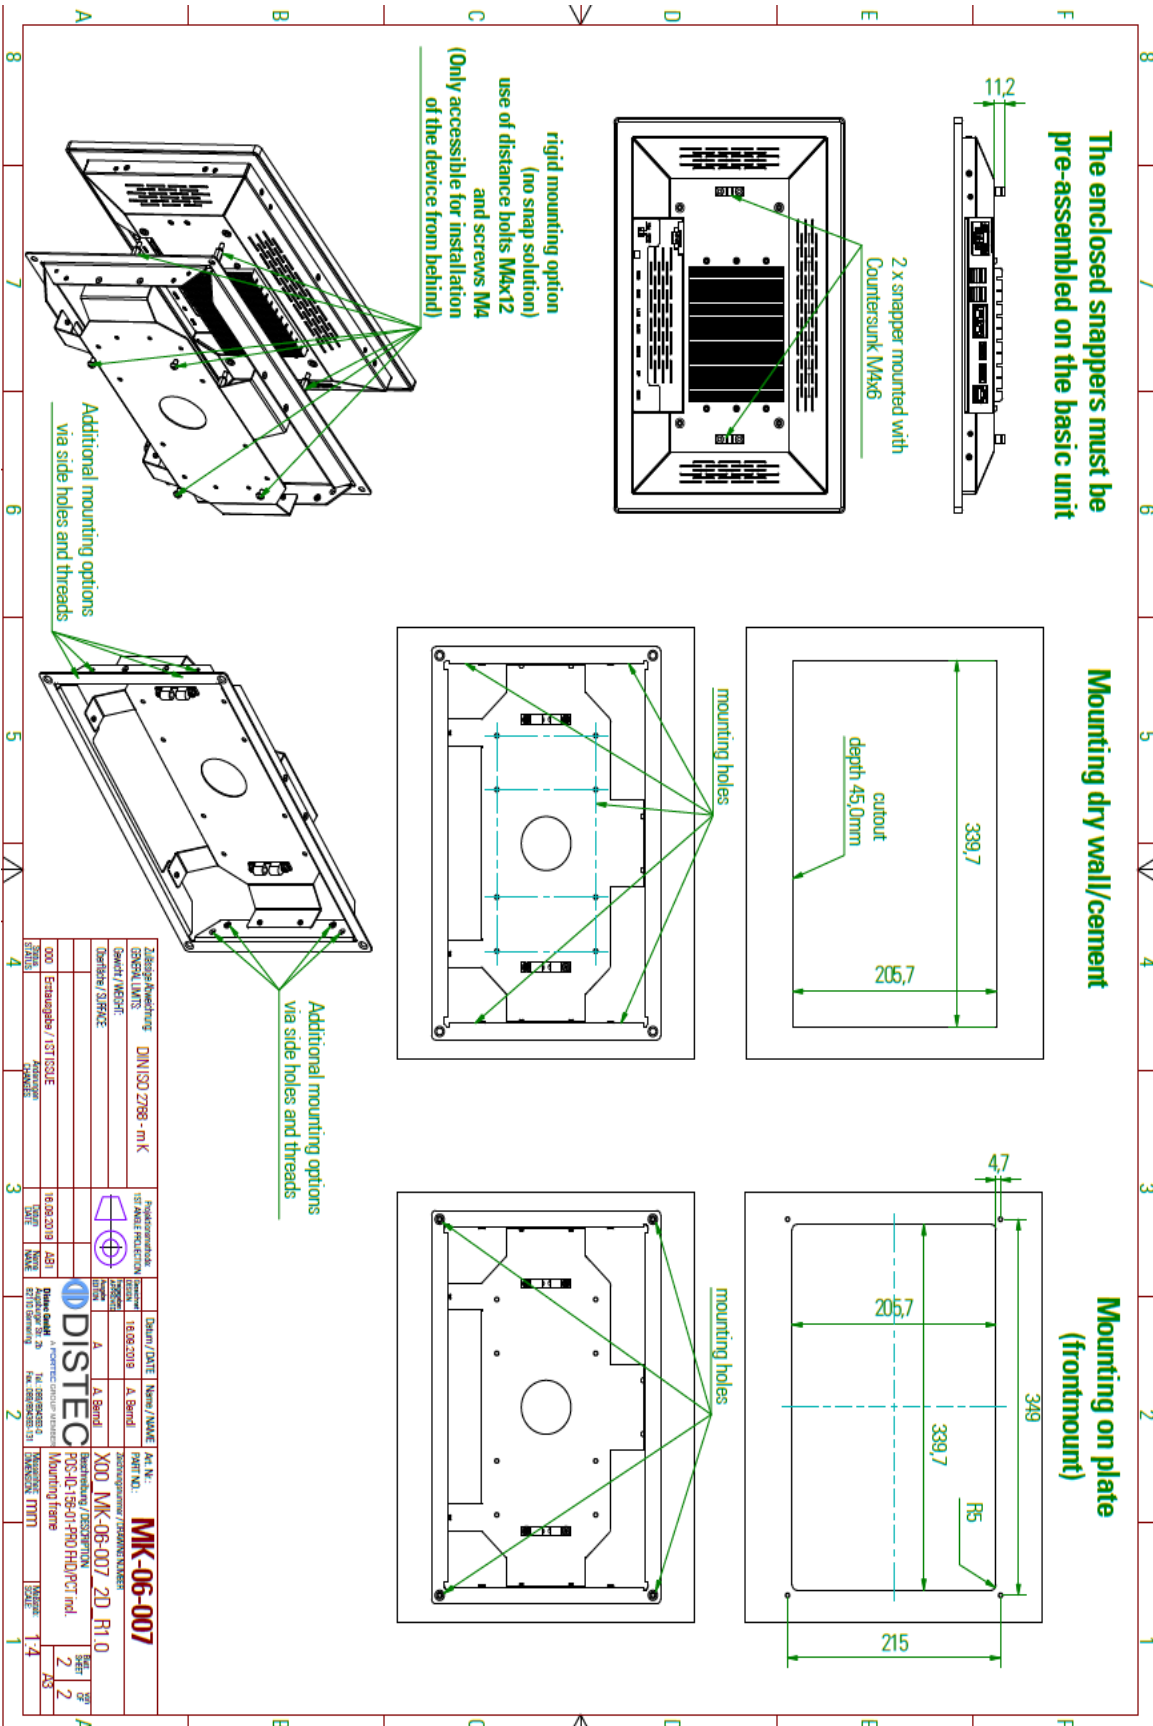

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

## Headquarters

### Germany



#### FORTEC Elektronik AG

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894450-0  
E-Mail: [info@fortecag.de](mailto:info@fortecag.de)  
Internet: [www.fortecag.de](http://www.fortecag.de)

## Fortec Group Members

### Austria



#### Distec GmbH Office Vienna

Nuschingasse 12  
1230 Wien

Phone: +43 1 8673492-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Germany



#### Distec GmbH

Augsburger Str. 2b  
82110 Germering

Phone: +49 89 894363-0  
E-Mail: [info@distec.de](mailto:info@distec.de)  
Internet: [www.distec.de](http://www.distec.de)

### Switzerland



#### ALTRAC AG

Bahnhofstraße 3  
5436 Würenlos

Phone: +41 44 7446111  
E-Mail: [info@altrac.ch](mailto:info@altrac.ch)  
Internet: [www.altrac.ch](http://www.altrac.ch)

### United Kingdom



#### Display Technology Ltd.

Osprey House, 1 Osprey Court  
Hinchingsbrooke Business Park  
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600  
E-Mail: [info@displaytechnology.co.uk](mailto:info@displaytechnology.co.uk)  
Internet: [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)

### USA



#### Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1  
Ronkonkoma, NY 11779

Phone: +1 631 5804360  
E-Mail: [info@apolloDisplays.com](mailto:info@apolloDisplays.com)  
Internet: [www.apolloDisplays.com](http://www.apolloDisplays.com)